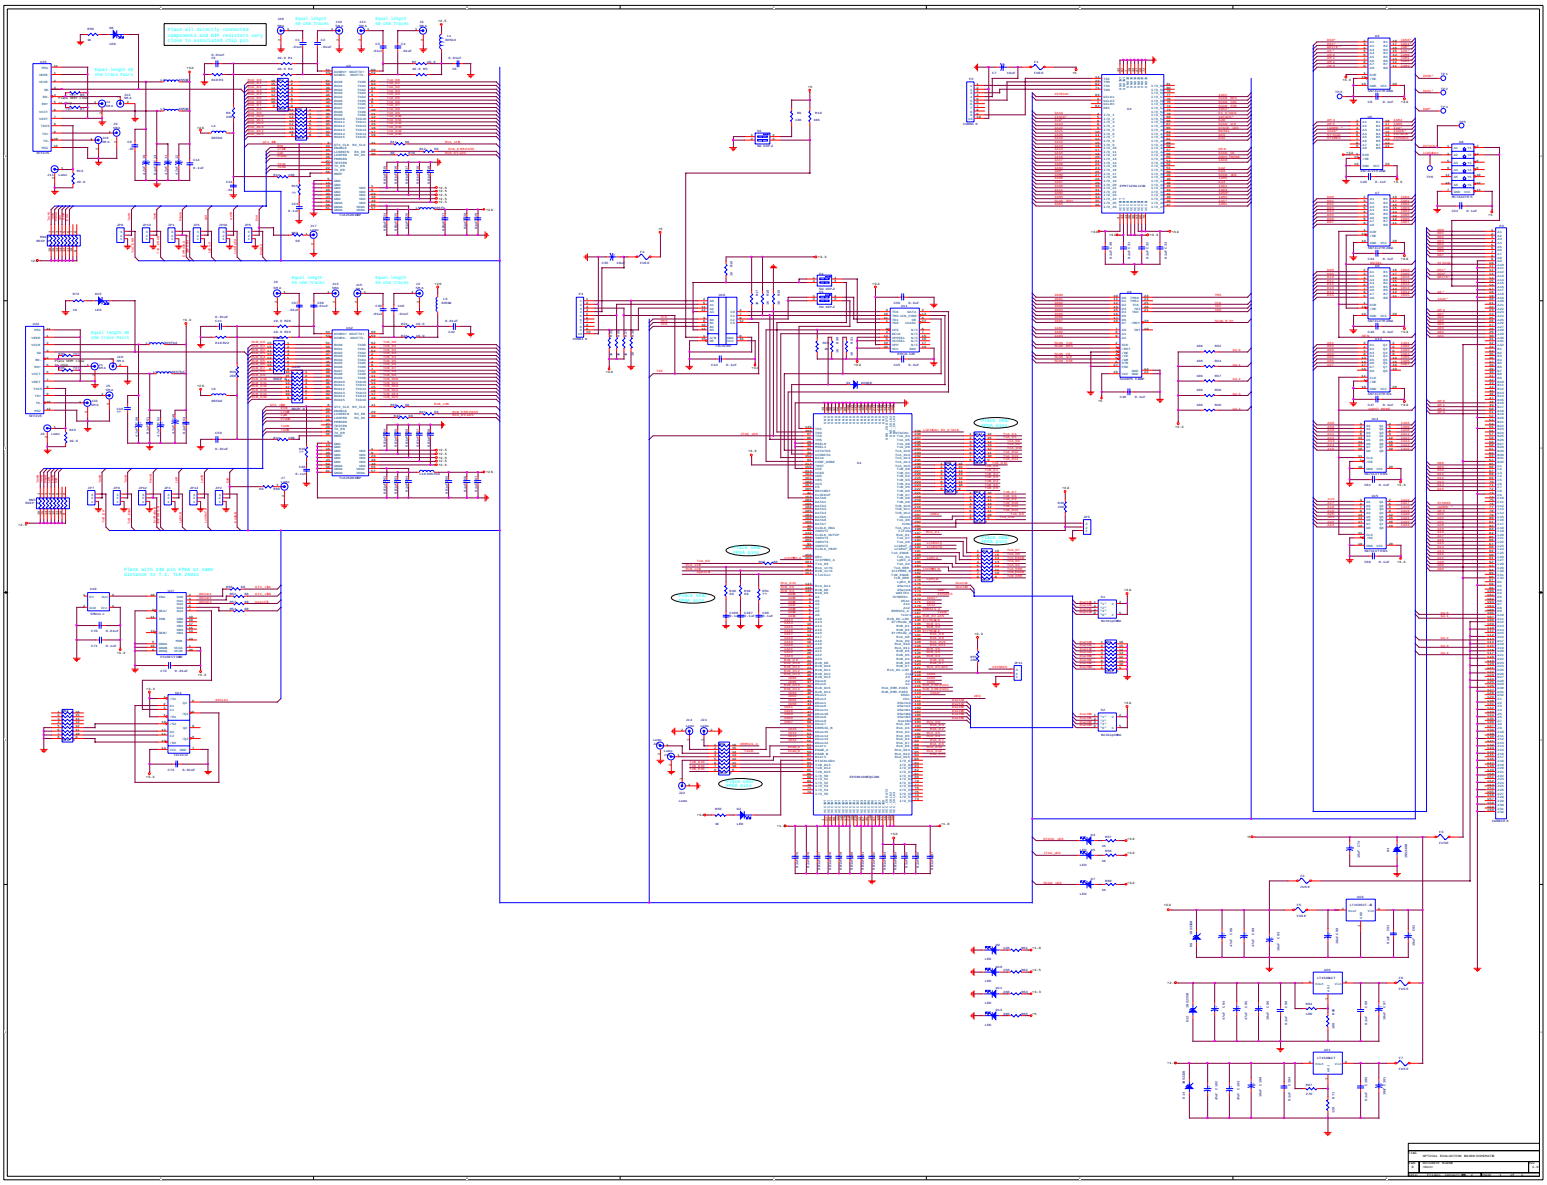
Place all directly connected
components and DIP resistors very
close to associated chip pin
Equal length 50 ohm traces
Equal length 50 ohm traces
Equal length 50 ohm traces
Equal length 50 ohm traces
Equal length 50 ohm traces
Equal length 50 ohm traces
Place with 240 pin FPGA at same
distance to T.I. TLK 2501
TITLE: ARTICULA EVALUATION BOARD SCHEMATICS
SIZE: A
DATE: 2/2/2000
REVISION:
SHEET: 1 OF 1